

- Protocol: ISO 11784/11785
- Tecnology: FDX-A, FDX-B, HDX, EM4102
- Memory: up to 1000 ID numbers
- Frequency: 134,2 kHx Read and Write
- Reading distance: ≥ 8 cm
- Display: 128x64 black and white, OLED
- Indication: battery charge control and Bluetooth
- Battery: Lithium, 1400mAh, 3,7V
- Dimensions: 155(L)x82(P)x33(H) mm
- Weight: 155 grams
- Charging mode: Mini USB
- Accessories: Mini USB cable, Lithium battery, product instructions
- Certifications: FCC, CE certification




Características Generales

Lector portátil de microchip PetSCAN V8 compatible ISO FDX-B, FDX-A y HDX.

La capacidad de memoria es hasta 1000 identificaciones, siendo muy fácil de utilizar.

PetSCAN es suministrado con una batería de Lithium, Bluetooth integrado y pantalla OLED.

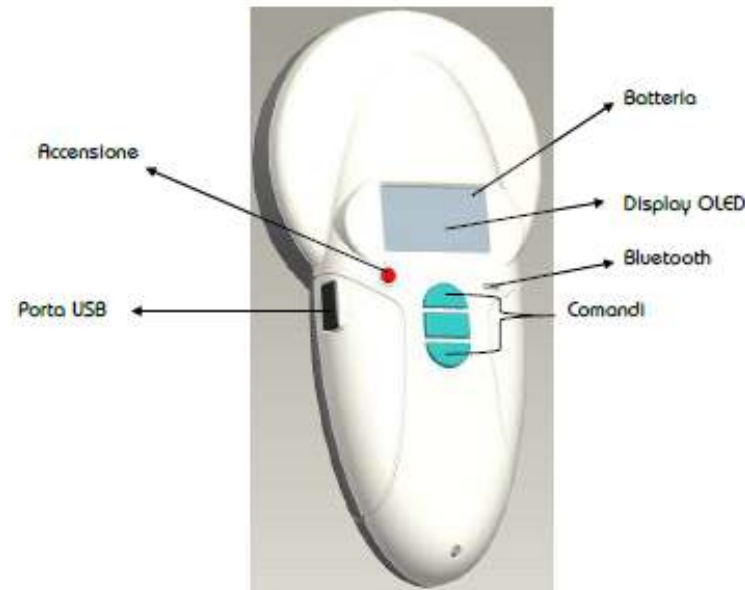

ParFor more details please contactar con su distribuidor

